


Tapered roller bearing 30222-JR-JTEKT - 30222-JR-KOYO

<https://www.123bearing.eu/bearing-housing/roller-bearing/tapered/30222-jr-koyo>

Single-row tapered roller bearings
metric series

Koyo

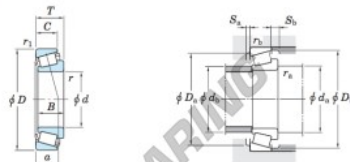

Boundary dimensions (mm)					Basic load ratings (kN)				Limiting speeds (min ⁻¹)		Bearing No. ¹⁾			
d	D	T	B	C	C _r	C _{0r}	C ₉₀	C ₁₀₀	Grease lub.	Oil lub.				
110	200	41	38	32	324	434			1 900	2 500	30222JR			
Dimension series to ISO 995 (Refer.)	Load center (mm) a	Mounting dimensions (mm)								Constant e	Axial load factors		(Refer.) Mass (kg)	
		d _{1a} min.	d _{1a} max.	D _{1a} min.	D _{1a} max.	S _{1a} min.	S _{1a} max.	r _{1a} min.	r _{1a} max.		Y ₁	Y ₀		
3FB	40.8	124	129	188	174	188	6	9	2.5	2	0.42	1.43	0.79	5.33

PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250121500
Inside diameter	110 mm
Inside diameter	4.331" inch
Outside diameter	200 mm
Outside diameter	7.874" inch
Thickness	41 mm
Thickness	1.614" inch
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE