


Drawn cup roller bearing BA1014-Z-IKO - BA1014-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba1014-z-iko>

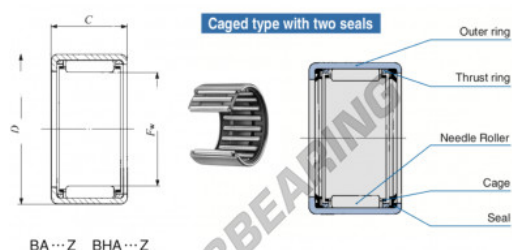

Boundary dimensions mm(inch)			Standard mounting dimensions mm			Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring
F_w	D	C	d	H	H_1	C	C_0	rpm	
15.875 (5/8)	20.638 (13/16)	22.221 (875/100)	15.875 (5/8)	15.854 (5/8)	20.638 (13/16)	10700	17500	25000	ISO 714

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060602985
Inside diameter	15.875 mm
Inside diameter	5/8" inch
Outside diameter	20.638 mm
Outside diameter	13/16" inch
Thickness	22.22 mm
Thickness	0.875" inch
Limiting speed	25000 rpm
Weight	100 g
Dynamic load	10.7 kN
Static load	17.5 kN
Packaging	-
Standard	No standard

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE